



Car Seat Cover



Sewing Supplies

- 1 1/4 yd (1.10 m) fake fur fabric on fabric width at least 45" (114 cm)
- Cotton fabric for facing 4" x 12"-14" (10 x 30-35 cm)
- Sewing thread
- 2 yd 10" (210 cm) Button hole stretch band
- 3 buttons

CUT

Measure the seat in your car. Back and front side of back support and down over the seat as illustrated. Add to this measurement 1 3/8" (3.5 cm) for hem on all sides. Cut out the length of the seat cover across fabric width. If the length is wider than across fabric width, cut two lengths of the fabric and sew together with straight stitch to requested length (try to get the seam on top of the back support). Place the piece on the seat and mark out for neck support opening.

Illustration A, B.

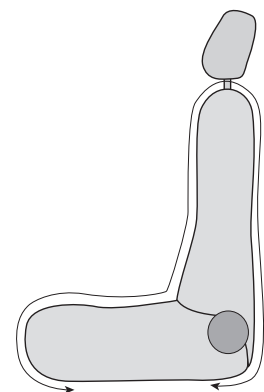


Illustration A.



Illustration B.

Select the three step zig zag stitch 04. Snap on presser foot A. Overcast all edges.

Select straight stitch 00. Place the cotton fabric centered on the hole for the neck support. Sew around the marked hole. Cut up. **Illustration C.**




Illustration C.

Turn facing to the wrong side. Turn under seam allowance 3/8" (1 cm) and press. Select zig zag stitch 03. Adjust stitch length to 2.0 and width to 2.0. **Illustration D.**

Press the long side raw edges 1 3/8" (3.5 cm) to the wrong side. Select the invisible hem stitch 08. Use presser foot D. Adjust stitch length to 1.0 and width to 4.5. Sew an invisible hem on the sides.




Illustration D.

Turn under a 1 3/8" (3.5 cm) wide hem on the short sides. Select straight stitch. Use presser foot A and stitch in place.

Divide the buttonhole stretch band in three pieces. Stitch them on the short edge on the front of the seat. **Illustration E.**

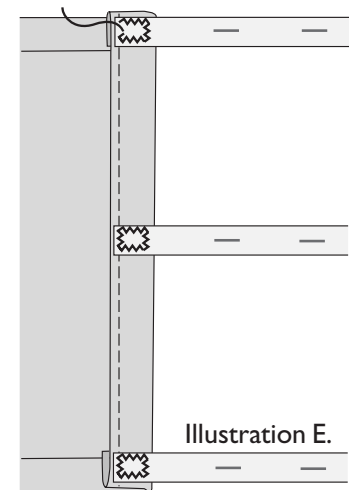


Illustration E.

Select the zig zag stitch 03. Snap of the presser foot and use the ankle only. Lower the feed teeth. Lower the ankle on the buttons taped in place on the short edge to be on the back of the seat. Adjust stitch width. Sew the buttons in place.

Illustration F.

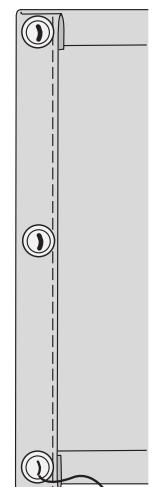


Illustration F.



Husqvarna

VIKING