

Travel Photo Frame

With this handy travel frame you will always remember your near and dear people at home. Sewing with leather or plastic is easy. Use the Smooth Glide Foot to avoid sticking to the surface as you sew.



Sewing Supplies

Husqvarna Viking Sewing machine

Blue canvas, 1 piece 23 3/4" x 13 3/4" (25 x 35 cm)

Red leather 1 piece 23 3/4" x 13 3/4" (25 x 35 cm), 1 strip, 6 3/8" x 3/4" (16 x 2 cm)

Plastic 1 piece 23 3/4" x 13 3/4" (25 x 35 cm)

1 1/2" (3 cm) Velcro

Sewing thread

Sulky 40 wt. Embroidery thread

Husqvarna Viking Tear Away' stabilizer

Husqvarna Viking Smooth Glide Foot H (411 85 30-45)

Finished size 11 3/8" x 5 3/4" (29 x 14.5 cm)

Cut all pieces according to above measurements.

With a pictogram pen, draw lines with 5/8" (1.5 cm) apart all over the fabric piece. Snap on presser foot B. Select decorative stitches and sew the along the lines. We have used: Stitch (Designer I: L11, Designer II & Quilt Designer: L₁11) and stitched this stitch twice between a combined stitch from (Designer I: L1, Designer II & Quilt Designer: L₁01) stitched centered and stitch (Designer I: L2, Designer II & Quilt Designer: L₁02) on both sides, one side mirror imaged. See illustration.

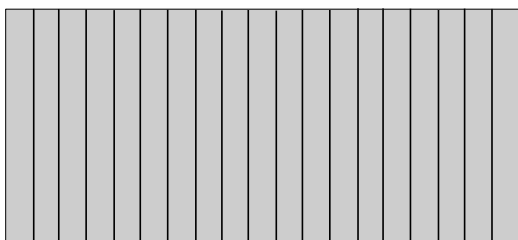


Illustration A.

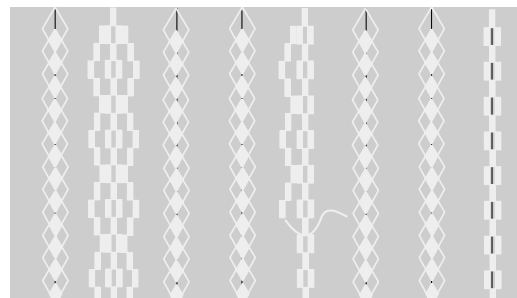


Illustration B.

Cut down the size of the piece to 11 3/8" x 5 3/4"
(29 x 14.5 cm)

Place the blue fabric centered on the back side of the leather. Trace all around with a pictogram pen. Draw a line 5/8" (1.5 cm) outside the traced line to fold around the edge.

Illustration C

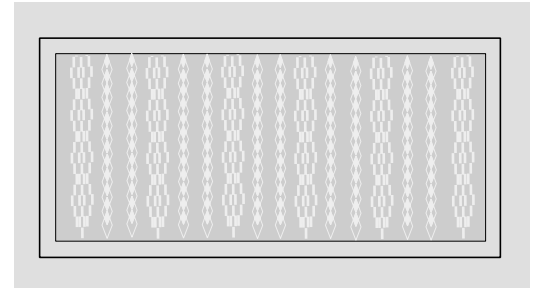


Illustration C.

Mark lines for cutting out frames according to the illustrated measurements. Cut out frames.

Illustration D

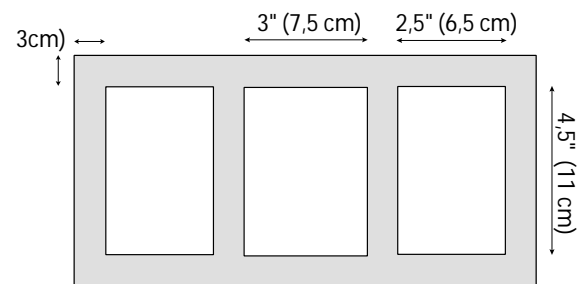


Illustration D.

Tape the plastic on the wrong side of the leather. Snap on the Smooth Glide Foot H . Select a star * (Designer I: D11, Designer II & Quilt Designer: D₁11) touch stop to sew only one star pattern. Sew stars in each corner of the frames.

Select straight stitch. Topstitch from star to star to stitch the plastic to the leather. From the wrong side, cut away excess plastic around the frames. Cut slits in the leather to insert the photos.

Illustration E

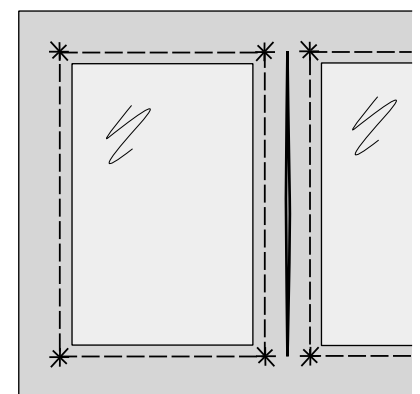


Illustration E.

Fold the 6 3/8" x 3/4" (16 x 2 cm) in half and topstitch all around.

Topstitch the loop side of the velcro to the strip. Sew the strip to the short edge of the frames. Fold the miniframes together and mark for placement of the velcro hook side. Topstitch in place.

Illustration F

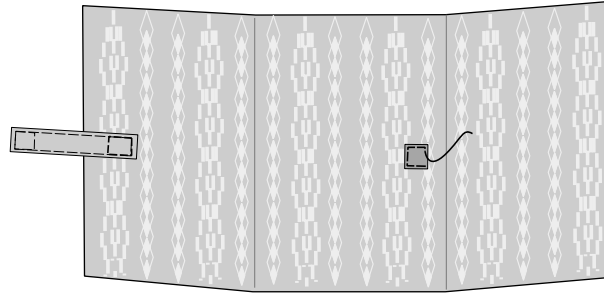


Illustration F.

Place the canvas piece on the leather wrong sides together. Cut the corners diagonally as illustrated, fold around the edge for a nice frame.

Illustration G,H

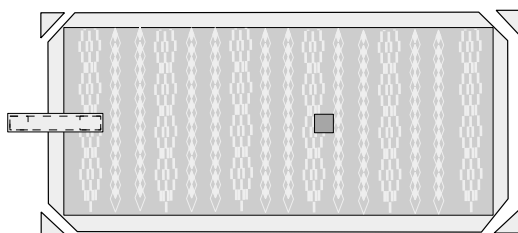


Illustration G.

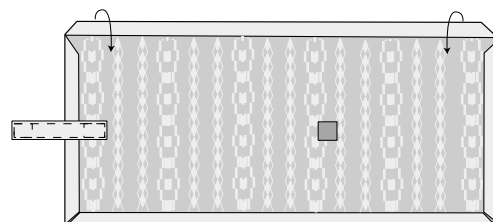


Illustration H.



 **Husqvarna**

VIKING