
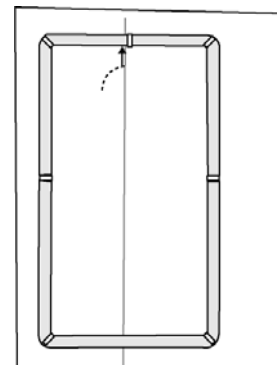


Continuous Hooping when using Broderie Anglaise

When sewing borders with Husqvarna Viking Embroidery Disk 48, Broderie Anglaise, on the Designer I, it's easy to re-hoop accurately! Here's how Alix Graham Michel, Husqvarna Viking Educator does it! Begin by programming in the border shown, or one of your choice.

1. Slide Embroidery Unit onto Designer I.
2. Touch PROG.
3. Insert Embroidery Disk 48.
4. Touch Menu 1, Design 9
5. Move the design to the top of the screen
6. Touch MENU
7. Select Design 9 again
8. See how it "snapped" into place!
9. Touch REP
10. Save changes? No (unless you intend to sew out the sequence again.)
11. Mark your fabric with a wash out fabric marker or by pressing a crease. The line should be the center point of your embroidered border as shown.
12. Hoop your first design, lining up the line you marked with the hoop marks as shown.
13. Hoop fabric and stabilizer.
14. Thread with Sulky rayon embroidery thread on top
15. Wind bobbin thread onto the bobbin and place into the bobbin case.
16. Touch START to begin sewing design.
17. When the machine stops for you to cut your threads, measure the distance from the first stitch, to the top of the hoop. Write down this measurement. Our example will use 1 1/2".
18. The first scallop and straight stitch outline of the eyelets will sew.
19. Touch Color + to color 2:1
20. Sew the second scallop and eyelet outline.
21. Remove the hoop from the machine and cut the eyelets with the eyelet cutter.
22. Slide the hoop back on the machine
23. Thread with Color 2
24. Finish the satin stitching on the second set of eyelets.
25. Your design is finished at this point and returns to the beginning.
26. Touch Color + to Color 1:2.
27. Sew the satin stitch on the remaining eyelets
28. Finish stitching the first design.

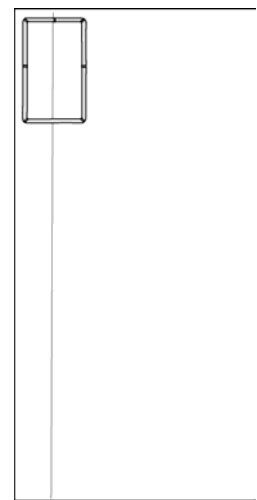

29. When done, remove the embroidery from the hoop, and re-hoop with the bottom of the first design the distance you measured, example, 1 1/2" from the top of the hoop. Lower the needle to check that you are in the correct spot. The needle should go right into the last stitch of the first embroidery.
30. Continue sewing your border.

